



Prices are in effect from March 1st to August 31st 2014





Foot switch & stand included with models EX-21K & EX-30K only prevent unintentional start-up of the saw. Head tilts 30° left and 45° right, tilting the blade, not the table. 2" cutting thickness capacity. Variable speed of 400 to 1400 stroke/minutes.



Heavy-duty router lift with 9 ¹/4" x 11 ³/4" aluminum top plate **\$369.99** reg. \$449.00 *****











style sliding table. Separate safety lock out switch for main motor & scoring motor. Solid castiron table with anodized aluminum coating. Heavy-duty cabinet-mounted cast-iron trunnions. Precision-built rip fence system with 50" guide rails. 3 HP motor.



bushing included.



Excalibur miter gauge Newly designed pointer/angle indicator provides better visibility to set precision fractional angles. Sliding stop flips up out of the way when not in use. Extension arm assembly makes it possible to quickly and easily find any angle and lock it securely in place. Quickly reverse the guide for left or right hand use.



Made in CANADA

52" cutting capacity.


reg. \$510.00

\$399.⁹⁹

Pivots arm away or removes in seconds.



10" overarm blade cover system with dust collection capability Unique design mounting bracket: pivots arm away or removes completely in seconds. 4" main boom and 3" inner boom. Flexible 3" hose connects the blade cover to the boom.

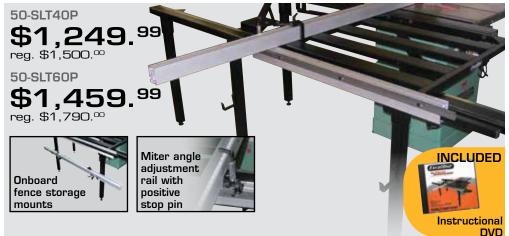

Sliding tables

50-EXBC10

\$399.99

Fits on most 10" to 14" table saws. Easy to adjust, extruded aluminum miter fence for accurate miters from 0° to 50° (50-SLT40P) or 0° to 45° (50-SLT60P). Cut up to 49"* (50-SLT40P) or 72"* (50-SLT60P) with the crosscut fence positioned at the rear of the table. Crosscut and miter up to 28"* (50-SLT40P) or 49"* (50-SLT60P) with the fence at the front of table.

⁶ Depending on the positioning of the main mounting bracket on your saw.



Mini-lathe duplicator

BONUS

1

unffam

hardware kit

Fits most 6" to 14" swing bench top lathes with cast bedways. Extruded aluminium base and carriage. Smooth handwheel controlled chain drive system.



36" wood lathe duplicator

Fits most 12" to 22" floor model lathes with cast bedways. Extruded aluminum base and carriage. Smooth handwheel controlled rack & pinion system. High speed steel cutter.



Steel support stand for Maxi-Lathe (25-195N) & bed extension (25-196) Fits General International models: 25-100, 25-114, 25-114QC & 25-200



Pen turning starter kit

Starter kit includes: 1 pen turning hardware kit for each of the following pen styles, 5 assorted wooden pen blanks & 1 bonus wine stopper hardware kit.



cooled industrial 2 HP motor.

25-250 \$59.⁹⁹

reg. \$126.00

5 piece wood turning mini-chisel set Includes:

- 1/8" gouge (#25-255) 1/4" gouge (#25-260

- ¹/₂₀ parting tool (#25-265)
 ¹/₄" round nose scraper (#25-270)
 ¹/₄" skew chisel (#25-275)
- wooden case (#25-280)

25-210 \$199.⁹⁹ reg. \$310.00

4 piece wood turning chisel set

Includes:

- ³/₄" diamond parting tool (#25-215)
- 1/2" round nose scraper (#25-220)
- 1" skew chisel (#25-225)
- 1/2" bowl gouge (#25-230)
- wooden case (#25-235)





12" dovetail jig

New clamping system for greater accuracy. The template offers a more stable platform for router as the height is lockable. Handles stock up to 12" wide and from 5/16" to $1\frac{1}{4}$ " thick. Comes with $\frac{1}{2}$ " aluminum template (40-016).





reg. 260.00

speed display. Quick lock control levers easily position tool rest. Maximum distance of 17 5/16" between centers. 3 variable speed ranges: 300 to 900, 600 to 1800 & 1200 to 3600 rpm. ³/₄ HP motor.

Electronic inverter for variable speed adjustment between 45 & 3750 rpm. Forward or reverse rotation. Low/High speed change lever for quick belt position changing. Quiet, highly efficient, low power consumption 2 HP motor.



13" horizontal single drum sander - 1 ¹/₂ HP 6 to 20 fpm variable feeding speed

(conveyor belt). Heavy-duty open steel stand. Independent switches with removable safety key for both conveyor motor and main motor. 1 ½ HP motor.



24" horizontal single drum sander - 2 HP

3 to 20 fpm variable feeding speed. Steel frame and heavy-duty base for greater stability. High quality conveyor belt for longer service life. Magnetic safety switch. 2 HP motor.



24" horizontal double drum sander - 3 HP

Two 5" diameter aluminum drums. High quality conveyor belt for long service life. Magnetic safety switch. 3 to 20 fpm variable feeding speed (conveyor belt). 3 HP motor.



\$1,0055 M1 \$1,099.99 reg. \$1,349.°°

6" x 89" oscillating vertical edge belt sander

Oscillating feature. Sanding belt operates at any angle from horizontal to vertical. Graphite covered steel platen for reduced friction and extended belt life. 1 ½ HP motor.

6" x 89" edge belt sander Same features as model 15-005S M1 without oscillating feature.

15-005 M1

\$979.⁹⁹

reg. \$1,259.00



belt) to maximize belt life and minimize tracking adjustments. Inward and outward tilting adjustable height steel auxiliary end table. Graphite backing reduces friction for longer belt life.

6" x 108" oscillating vertical edge belt sander

Oscillating feature. Tables can be adjusted up or down for full belt use. Graphite backing reduces belt friction for longer belt life. Dynamically balanced 7" rubber drive roller and crowned 3" idler roller to ensure solid belt tracking. 2 HP motor.

6" x 108" edge belt sander Same features as model 15-010S M1 without oscillating feature.

\$1,899.99 reg. \$2,375.00





15-210 M1 \$2,999.99 reg. \$3,995.°°

6" x 108" oscillating vertical edge belt sander 3250 lin. fpm belt speed. 2 HP motor.

\$4,499.99 reg. \$5,900.00

9 ¹/²" x 135 ¹/²" oscillating vertical edge belt sander 4000 lin. fpm belt speed. 3 HP motor.





Oscillating spindle sander bench top model

Precision ground cast-iron tilting table. 29 oscillations per minute. 5 interchangeable spindles including ¼", ½", 5%", 1 ½" & 2". 1720 rpm spindle speed. ½ HP motor.



Oscillating spindle sander

Heavy-duty oil bath gearbox. 75 oscillations per minute. 10 interchangeable spindles including ¼", ¾", ½", 5%", ¾", 1", 1 ½", 2", 3" & 4". 1725 rpm spindle speed. 1 HP motor.



30" oscillating pedestal fan - 3 speeds Adjustable height (69 ¼" to 93 ¾"). Wide stable steel base plate. Quiet operation. 3 speed settings : 800, 950 & 1100 rpm. ¼ HP motor.

480-1-M2

\$2,599.99 reg. \$4,625.00

Sanders, Jointers & Shapers

\$8999.99 reg. \$1,100.00

6" closed base jointer

55 ¼" **long tables.** Large surface, ground cast-iron tables. Cast-iron fence with 90° & 45° positive stops. Independent in-feed and out-feed table adjustment handwheels. 5000 rpm cutter head speed. 1 HP motor.

6" closed base jointer with Magnum helical head Same features as model 80-100L M1+ Magnum helical head, #100H (4 rows, total: 16 inserts).

80-100LHC M1 **\$1,399.**99

reg. \$1,800.00



80-200L M1 **\$2,099.**99 reg. \$2,600.00

8" jointer

74 7⁴, **in long tables.** Large surface, ground cast-iron tables. Independent in-feed and out-feed table adjustment handwheels. Magnetic switch for added safety. 5500 rpm cutter head speed. 2 HP motor.

8" jointer with Byrd style helical head Same features as model 80-200L M1+ Byrd helical head, #200HB (4 rows, total: 36 inserts).

80-200LHC M1 **\$2,749.**99 reg. \$3,350.00





Deluxe 8" jointer 74" long tables. Precision-machined and

74" long tables. Precision-machined and polished, high quality, heavy-duty, ribbed castiron frame. One-piece, top-quality machined steel cutter head, mounted on 2 sealed, permanently lubricated bearings. Highly accurate guide fence. 1 ½ HP motor.

Deluxe 8" jointer with Magnum helical head

Same features as model 480-1-M2 + 2 HP motor and Magnum helical head, #485H (4 rows, total: 22 inserts).





3/4" spindle shaper ¼" & ½" router bit adapters included. 2 spindle speeds with reverse: 8000 & 10,000 rpm. Fence system / cutter head guard includes a cutter guard, spring holddowns and a built-in 4" dust collection outlet. 3 HP motor.



1 ¹/4" **production shaper** 4 spindle speeds with reverse: 4000, 6000, 8000 & 10,000 rpm. Magnetic switch with thermal overload protection. Built-in retractable caster system. 5 HP motor.




1 ¹/4" heavy-duty production shaper 5 spindle speeds with reverse: 3000, 4000, 6000, 8000, & 10 000 rpm. Independent left and right micro-adjustable fences, with a cutter guard, spring hold-downs and a built-in 4" dust collection outlet. Magnetic switch with thermal overload protection. 5 HP motor (M1) / 7 ¹/₂ HP motor (M2 & M3).



8" parallelogram jointer

Large surface 82 γ_8 " cast-iron tables. Heavy-duty center-mounted cast-iron fence with 45°, 90° and 135° positive stops. Precision four point parallelogram table adjustment system. Magnetic safety switch mounted above the in-feed table for quick, easy access. 5000 rpm cutter head speed. 3 HP motor.

Large surface, precision ground 84 ¼" cast-iron tables with built-in rabbeting ledge. Handwheel adjustable in-feed and out-feed tables mounted on dovetailed ways. Accurate depth of cut scale in inches. Two way tilting fence with positive stops at 45° and 90°. 5500 rpm cutter head speed. 3 HP motor.

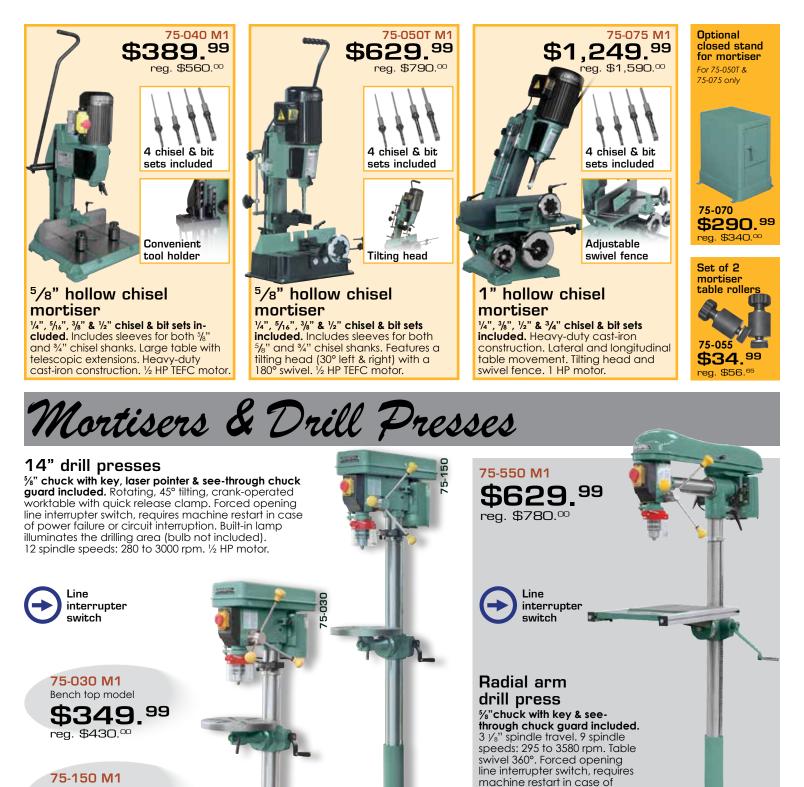

75-150 M1 Floor model \$384.⁹⁹ reg. \$470.00

Portable pocket hole jig Adjustable variable hole-to-centerline distances allows for different hole placement depending on width of stock. Cast base with 4 mounting holes. Durable %" step drill bit with adjustable depth stop collar. Kit includes 25 each 5/8", 1", 1 1/4", 1 1/2" self-tapping screws.





\$127.99

reg. \$185.00

power failure or circuit interrup-tion. Table extension provides

additional support.

for 75-025, 75-030, 75-

125, 75-150, 75-160 &

1/2 HP motor.

Laser pointer for drill press









Mortising attachment kit Convert almost any drill press into a mortiser in minutes!

Contents: Mounting hardware. Cast-iron chisel holder. Guide fence with workpiece hold down. 4 of the most commonly used mortising chisel and bit sets with $\frac{5}{6}$ " bit shank x ¹/4", $\frac{5}{76}$ ", $\frac{5}{6}$ " & $\frac{1}{2}$ ". Includes 52, 55, 58, 60, 65 and 66 mm adapter bushings.



99

959.

reg. \$1,270.00



USB 2.0 port for easy file transfers. Positional accuracy up to 0.001" & variable cutting speeds up to 118" per minute. Aluminum table with integrated hold down clamps. Tool kit with starter cutting tools included. No external operating PC required. Unlimited and ongoing technical support.





Portable dust collector -1 HP

Airflow capacity 700 cfm*. Dust hood rotates 360°. Adjustable multi-position steel support arm to accommodate a variety of different machines or applications.



Dust collector - 1 HP Airflow capacity 647 cfm*. Sound rating 75 to 80 dB. Equipped with washable, extrafine 2 micron filter bag.



Dust Collectors

* All cfm ratings tested under resistance to simulate typical shop usage.



micron filter bags replacing canister filters.

10-210A M1 \$869.⁹⁹ reg. \$1,275.00





10-105ACF M1

with canister filter Airflow capacity 1100 cfm*. Sound rating 80 to 85 dB. Equipped with 1 micron canister filter.

Dust collector - 1 1/2 HP Same features as 10-105ACF with washable, extra fine 2 micron filter bag replacing canister filter.

10-105A M1 \$469.⁹⁹ reg. \$650.00





874.99 reg. \$1,150.00

Dust collector - 2 HP

with canister filter Airflow capacity 1550 cfm*. Sound rating 80 to 90 dB. Equipped with 1 micron canister filter.

Dust collector - 2 HP Same features as 10-110ACF with washable, extra fine 2 micron filter bag replacing canister filter.







"SUPER TURBO" Air cleaning system Airflow Capacity of 700, 900, 1250 cfm. Superior 2 stage filtration system includes a disposable, pleated outer filter and a

3 pocket inner filter. 5 preprogrammed timer settings (2, 4, 6, 8 hours & continuous). Includes filter cleaning sensor with indicator light. 1/3 HP motor.



Flexible expandible roller stand

Adjustable height from 23" to 36". 9 nickelplated 1 ¹/₂" × 13 ³/₄" rollers. 50" maximum expanded length. 14 ³/₄" compacted length. 4" wheels with locking foot levers.



79 99

Maximum load capacity of 400 lbs

50-167S

Flexible expandible 2-way heavy-duty roller stand

Adjustable height from 24 1/4" to 37". 9 nickel-plated 2 1/4" x 20" 2-way rollers. 51 1/2" maximum expanded length.





Printed in Canada



Cyclonic tank kit

Ideal for small shops: Can be used with any shop vacuum or small dust collector with 1 1/2", 2 1/2" or 4" inlets, to create a portable 2-stage dust collection system.



Included accessories:

(1) 6 gallon caster-mounted drum. (1) 2-stage cyclone/separator lid. (2) Hoses with $3 \times 2 \frac{1}{2}$ " adapter fittings. (1) $2 \frac{1}{2}$ " - 4" reducer fitting. 1 ½" - 2 ½" reducer fitting. 4" clamp. (1) 2 ¹/₂" clamp



10-715 M1 \$199.⁹⁹



99-500 **\$6**.99 reg. \$10.50



Portable down draft table 4" dust port connects to your shop dust collector. 18 1/2" x 35 1/2" table with internal baffles. 6 adjustable stops. Sturdy steel frame and lightweight design.

10-300 M1 4 99 reg. \$465.00

10 gallon wet / dry vacuum cleaner

Stainless steel tank 10 gallon capacity. Rated for heavy-duty maintenance & janitorial use. 2 stage air filtration. $\frac{1}{2}$ HP motor with 2 speeds.

Included accessories:

• Flexible 6' hose with curved end pipe (#10-306).

- 2 piece extension wand (#10-309).
- Crevice nozzle (#10-310).
- 12" wide brush nozzle (#10-314). • Professional wet nozzle (#10-323).
- Canister filter (#10-332).
- Cloth filter (#10-334).
- Round brush nozzle (#10300-11B). • Wet nozzle (#10300-35B).





Down draft table Provides a higher level of safety and convenience by collecting dust at the source. Steel top with rubber grommets to hold and protect the work piece. Two onboard 110 V electrical outlets.